

# DP052C

Air dehumidifiers for industrial processes



Many configurations

Casing in stainless steel double skin

High performance desiccant rotor

Simple maintenance

High efficiency fans with EC motor

Programmable logic controller (PLC) with integrated controls (humidity, temperature and air flow)




## DP052C technical specifications

Dry air flow range : de 700 à 2200 m<sup>3</sup>/h

Wet air flow : 375 m<sup>3</sup>/h

Electrical power : 11,25 kW

## Capacity diagram

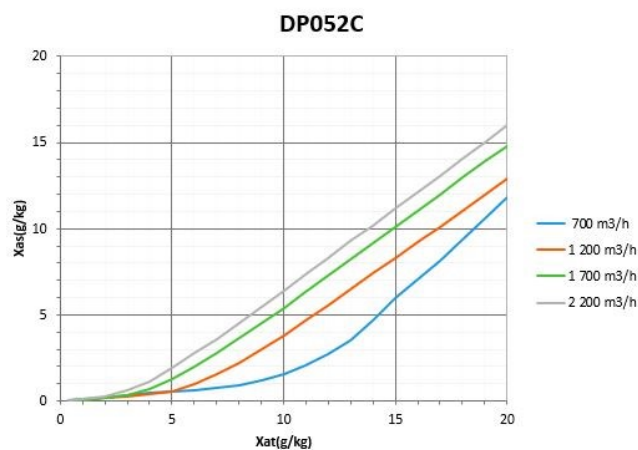

Example :

T\_AT = Process air temperature

T\_AS = Dry air temperature

DP052C :  $T_{AS} = T_e + \Delta x \cdot 3,5 \pm 5500 / Q_v$

# References

DP052	C	D	5	0	0	B	0	D
<b>Range</b> DP : Product type 052 : 550x200mm	<b>Reactivation power</b> C : 11,25kW	<b>Process air fan configuration</b> 0 : Without AF B : 0,3kW C : 0,5kW D : 1,0kW Q : 2 x 0,3kW R : 2 x 0,5kW S : 2 x 1,0kW	<b>Filtration configuration</b> 0 : G4 React 1 : F8 React 2 : F9 React 3 : G4/F8 React 4 : G4/F9 React 5 : G4 6 : F8 7 : F9 8 : G4/F8 9 : G4/F9	<b>Electrical configuration</b> 0 : Basic 1 : 4th PIDc* 2 : 5th PIDc* 5 : Basic + PF 6 : 4th PIDc* + FP 7 : 5th PIDc* + FP	<b>Blocks configuration</b> 0 : Without blocks M : Upstream block V : Downstream block B : Up and downstream blocks	<b>Power supply mode</b> B : 3P + N + T C : 3P + T	<b>Reactivation utility</b> 0 : Electricity 2 : Steam 4 : Gas 6 : Hot water	<b>Easement</b> G : Left D : Right

AF : Air fan  
 PIDc : Configurable PID control  
 FP : Filter pressure switch  
 Basic : 3 PID control (humidity, process & reactivation air flows)

# Dimensions

